

Checked

(b) Layout Dimensions Eauation Eauation Dim. Var. Dim. Var. Eauation Dim. 3S + 2TX + 2TI 2 V - - -\_ \_ \_ G HT + TS - 12" 2A + B + C + 2E- - -Ε G + 23" TW  $|Max{3'-4"} \text{ or } (BS + 12")}$ 

Hydrolog	ic Data
Drainage Area = mi	2
Design Flood Frequency	/ = years
Design Flood Discharge	e = cfs
Design Flood (D.F.) El	evation =
Base Flood	(100-year)
Base Flood Elevation =	
Base Flood Discharge =	cfs
Estimated Backwater =	f†
Outlet Velocity = f	t/s
Roadway Overtopping	
Overtopping Flood Disc	charge = cfs
Overtopping Flood Fred	quency = years
Flood Elev	vation =

Elevations	⑥─ Fill Heights
Upstream (Elev. 1) =	€ Rdwy at € Culvert = ft
Downstream (Elev. 2) =	Design (All units) = ft
Pr. Gr. at Tie Sta. =	
Dimensions are based on end units	/ S•

Fill heights are measured from the top of top slab to the top of earth fill or roadway.

SEC/SUR \*

TWP \*

RGE \*

THIS MEDIA SHOULD

NOT BE CONSIDERED A CERTIFIED

DOCUMENT.

3/8/2021

JOB NO

\*

CONTRACT ID.

PROJECT NO

BRIDGE NO

BXC07

MΩ

SHEET NO

\*

ROUTE \*

BR

Estimated Quantities Final Class 4 Excavation cu. yard Removal of Bridges lump sum Class B-1 Concrete (Culverts-Bridge) cu. yard Reinforcing Steel (Culverts-Bridge) pound

General Notes:

Design Specifications: 2010 AASHTO LRFD Bridge Design Specifications and 2010 Interim Revisions

Design Loading: Vehicular = HL-93 minus lane load, Earth = 120 lb/cf Equivalent Fluid Pressure = 30 lb/cf (min.), 60 lb/cf (max.)

Design Unit Stresses: Class B-1 Concrete (Box Culvert) f'c = 4,000 psi Reinforcing Steel (Grade 60) fy = 60,000 psi

Standard Plans: 703.37, 703.80, 703.86, 703.87(4)

Miscellaneous:

MoDOT Construction personnel will indicate the type of box culvert constructed:

☐ Precast Concrete Box used ☐ Cast-in-Place Concrete Box used

When alternate precast concrete box sections are used, the minimum distance from inside face of headwalls to precast sections measured along the shortest wall shall be 3 feet. Reinforcement and dimensions for wings and headwalls shall be in accordance with Missouri Standard Plans.

Channel bottom shall be graded within the right of way for transition of channel bed to culvert openings. Channel banks shall be tapered to match culvert openings. (Roadway Item)

Traffic Handling:

Structure to be closed during construction. Traffic to be maintained on during construction. See roadway during construction. See roadway plans for traffic control.

В.М.

CULVERT-BRIDGE: ROUTE \* OVER \*

ROUTE \* FROM \* TO \* ABOUT \* MILES \* OF \* TIE STA. \_\_\_\_\_

Note: This drawing is not to scale. Follow dimensions.

Sheet No. 1 of

LOCATION SKETCH

BXC07\_tri\_sq\_str.dgn 10:24:09 AM 3/8/2021

ORTATION



Some details have been grouped together to allow easy substitution with alternate details. To edit grouped details. select them and press <Ctrl> U

1) Ahead station is shown for streams flowing left to right. Arrow must be flipped for streams that flow right to

2 Modify Estimated Quantities as required. Don't leave blank rows but leave space between Estimated Quantities and General Notes for at least one pay item to be added during construction. See Alternate Details for culvert extensions, or if five items

(3) Add any required transverse joints proportionally spaced along the barrel Label units and add actual lengths of units along the barrel.

(4) Insert STD 703.60 when pipe inlets are required. Add pipe inlets to Plan of Layout Dimensions at appropriate locations and to Elevation A-A if visible from elevation. Add inlet data using notes where space allows. or use tables.

(5) For nonstandard culverts with only one design fill height, add supplemental reinforcement table.

6 No need to revise General Elevation A-A for dual roadways. In Fill Heights table add a lane designation after & Rdwy and insert another row for the other lane.

## \*\*\* VARIABLE DESIGN FILL HEIGHTS \*\*\*

a Select and delete the details grouped with the Fill Heights table. Select and move the alternate grouped details to drawing.

(b) Place "See Member Thickness table" in the Equation column and place "Varies" in the Dim. column. If Dimension F varies. place "Varies" in the Dim. column.


© Remove blank rows. End units may have different design fill heights but both units need to have the same member thicknesses.

d This portion of table required when design fill height exceeds limits of the standard plans or when culvert cel height or span is not standard. If only a portion of the units are nonstandard. fill out entire table using the values from the standard table where applicable. Omit if not required.

If any part of the barrel is exposed, the roadway fill shall be warped to provide 12 inches minimum cover. (Roadway Item)

Construction joint key not shown for clarity, see standard plans for details.

If unsuitable material is encountered. excavation of unsuitable material and furnishing and placing of granular backfill shall be in accordance backfill shal with Sec 206.

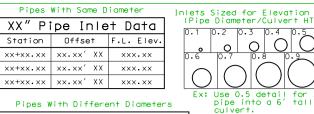

Supplemental Pipe Inlet Details 4

-Alternate Details for Multiple Design Fill Heights (a)

Inlets Sized for Elevation A-A (Pipe Diameter/Culvert HT)

Pipe Inlet Data Station Offset Dia F.L. Elev xx+xx.xx xx.xx' XX xx" xxx.xx xx+xx.xx xx.xx' XX xx" xx+xx.xx | xx.xx' XX | xx"

Ex: Use 0.5 detail for 36 pipe into a 6' tall culvert.

J3 Bars

2 3 Unit No. € Trans. Jt.

PLAN OF TRANSVERSE JOINTS AND STAGE CONSTRUCTION

Remove if not applicable.

Sz.Spa.Sz.Spa.C1 K2

## ALTERNATE AND SUPPLEMENTAL DETAILS

-Supplemental Reinforcement Table (Nonstandard culverts with only one design fill height)

Top Slab Reinforcement Bottom Slab Reinforcement H1 Bars J4 Bars B1 Bars B2 Bars Sz.Spa. C5 08 Sz.Spa. C6 09 Sz.Spa.Sz.Spa. C4 Sz.Spa. C7 Q10 Sz. Spa. Sz. Spa. G1

Substitute table for tables shown on Standard Plan 703.87



Fill heights are measured from earth fill or roadway Dimensions are based on end units, except AA is based on Unit the top of top slab to the top of

Estimated Quantities			Final
Class 4 Excavation	cu. yard	×	
Temporary Shoring	lump sum	1	
Partial Removal of Culvert-Bridge Concrete	lump sum	1	
Class B-1 Concrete (Culverts-Bridge)	cu. yard	×	
Reinforcing Steel (Culverts-Bridge)	pound	×	

Alternate Estimated Quantities for Culvert Extensions or when Five Items are Required

Corresponds to the border of the standard drawing for ease in moving alternate details (Snap to corner)

— Alternate Plan of Transverse Joints

© Trans. Jt. (Typ.)

TTTTTLE Trans. Jt.

₹ Trans. Jt.

☐ ☐ ☐ € Trans. Jt.


TTTTTTTE Trans. Jt.


1 2 3 4 5 6 Unit No.

1 2 3 4 5 6 7 Unit No.

1 2 3 4 5 6 7 8 Unit No. € Trans. Jt.

1 2 3 4 5 6 7 8 9 Unit No.



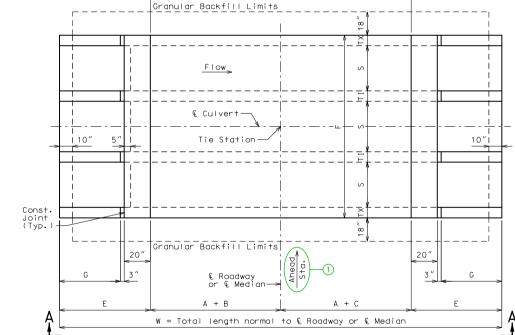

Barrel Length

PLAN OF LAYOUT DIMENSIONS

(c) Top Slab Reinforcement Bottom Slab Reinforcement Wall Reinforcement Unit Unit Thickness H1 Bars J4 Bars H3 Bars B1 Bars B2 Bars No. ength TS BS TX TI Sz.Spa. Sz.Spa. C1 K2 08 Sz.Spa. C6 09 Sz. Spa. Sz. Spa. C4 Sz.Spa. C7 Q10 x Substitute table for tables shown on Standard Plan 703.87

BXC07