



- \* 1/4" removal not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
  - \*\* 1/4" (min.) for Epoxy Polymer Concrete Overlay
  - 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
  - 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface
- HALF-SOLED AREA**

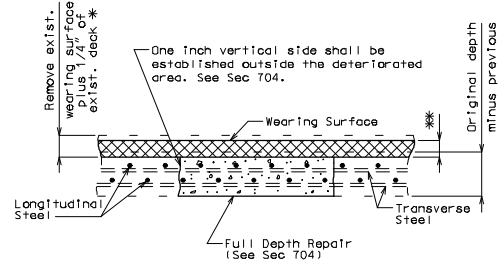

- \* 1/4" removal not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
  - \*\* 1/4" (min.) for Epoxy Polymer Concrete Overlay
  - 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
  - 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface
- FULL DEPTH REPAIR**

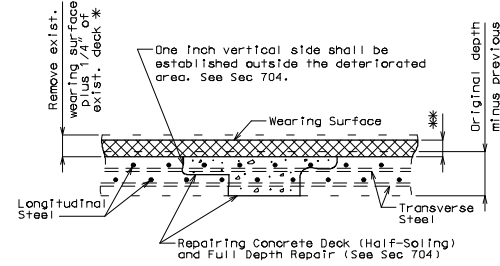

- \* 1/4" removal not required for Asphaltic Concrete Wearing Surface and Epoxy Polymer Concrete Overlay.
  - \*\* 1/4" (min.) for Epoxy Polymer Concrete Overlay
  - 1 3/4" (min.) for Latex Modified Concrete Wearing Surface
  - 2 1/4" (min.) for Low Slump Concrete or Silica Fume Concrete Wearing Surface
- FULL DEPTH REPAIR  
IN HALF-SOLED AREA**

**DECK REPAIR DETAILS**

Note to Detailer:  
Modify details as required by project.

DATE PREPARED 07/28/2008	
ROUTE *	STATE MO
DISTRICT BR	SHEET NO. *
COUNTY *	
JOB NO. *	
CONTRACT ID.	
PROJECT NO.	
BRIDGE NO. WID 4A	
DESCRIPTION	DATE
MISSOURI HIGHWAYS AND TRANSPORTATION COMMISSION	
105 WEST CAPITOL JEFFERSON CITY, MO 65102 1-888-ASK-MODOT (1-888-275-6636)	

\* THIS MEDIA SHOULD NOT BE CONSIDERED A CERTIFIED DOCUMENT. \*

IF A SEAL IS PRESENT ON THIS SHEET IT HAS BEEN ELECTRONICALLY SEALED AND DATED.